



ELEVATION VIEW

NOTES

- A. GALVANIZED STEEL POST 2" O.D. x 12' LENGTH. RESTS ON REBAR IN SLEEVE
- B. $2\frac{3}{8}$ ALUMINUM PIPE SLEEVE 2.5" I.D. x 2.9" O.D. x 30" LENGTH W/TWO HOLES $\frac{3}{4}$ " Ø @ 90°; HOLES $\frac{3}{4}$ " FROM TOP OF PIPE, W/TWO HOLES $\frac{3}{4}$ " Ø, HOLES 6" FROM BOTTOM FOR REBAR
- C. CAST STEEL RETAINING RING 3" I.D. x 4" O.D. x 1.5" DEPTH THREADED FOR \S^5 " Ø MACHINE SCREW. RING WILL BE TURNED SO THAT THE SCREWS FACE THE STREET
- D. STEEL RE-BAR #4 Ø x 8" LENGTH
- E. MACHINE SCREW PLATED $\frac{5}{8}$ " x $1\frac{1}{2}$ " ZINC BOLT. APPLY ANTI-SEIZE COMPOUND TO BOLT THREADS.
- F. CONCRETE FOOTING 8" Ø x 26" DEPTH.
- G. BLACK DIRT & SEED 4" TO MEET FINAL GRADE
- H. LYLE SIGNS, INC. BR-95 SIGN MOUNTING BRACKET OR APPROVED EQUAL (USED IF A TRAFFIC SIGN IS REQUIRED) SEE DETAIL STR-22 FOR MOUNTING HEIGHT
- * ITEMS B, C, D, & E WILL BE EARL F. ANDERSON TUBULAR POST BREAKAWAY SYSTEM OR APPROVED EQUAL SEE DIVISION 2, PART A, SECTION 2564

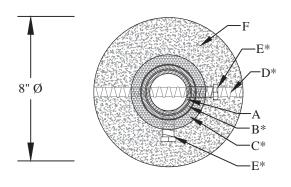

PLAN VIEW

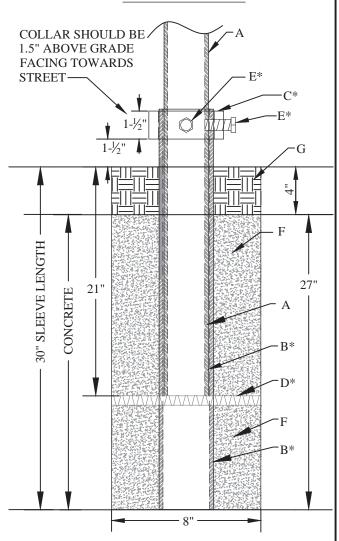

INSET VIEW OF SLEEVE & FOOTING



CITY OF BURNSVILLE - ENGINEERING DEPT.

ROUND SIGN POST INSTALLATION Plate No. STR-23

Revision Date

1/2018

File Location: